

## Tech Data

# Viega Powerhead for Stainless Manifold 24V 4-Wire



### Description

Powerhead part number 15069 is a 4-wire two position actuator which mounts on the return valve of the stainless manifold. A 24 VAC signal actuates the head to open the valve. The position of the valve is normally closed. Upon opening the valve, the integral SPST contacts close.

The powerhead may be used on both 1¼" stainless shut off / balancing and stainless shut off /

balancing / flow meter manifolds. Typical applications include circulator control when used with Viega Zone Control 18060 or 18062, boiler heat call (T-T) or control of auxiliary devices requiring end-switch contact closure.

### Features

- Integrated micro switch with floating contact
- Light gray in color, Viega logo on front
- Normally closed valve position
- Water resistant
- All around function indicator
- 360° installation position
- Snap-on installation
- Valve adapter concept
- Initially-Open function
- Normally open end switch
- May be installed in any position

### Specifications

- Voltage: 24VAC
- Max Inrush Current: 300 mA for 2 minutes max
- Operating Power: 1W
- Closing / Opening Time: Approximately 3 minutes
- Stroke: 4 mm
- Actuating Force: 21 lbs.
- Weight: 5.5 oz.
- Fluid Temperature: 32°F - 212°F
- End Switch: Normally Open
- Micro Switch: 24VAC / 0.5A
- Switching Point: 2mm




This document is subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).



Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**

### Dimensions

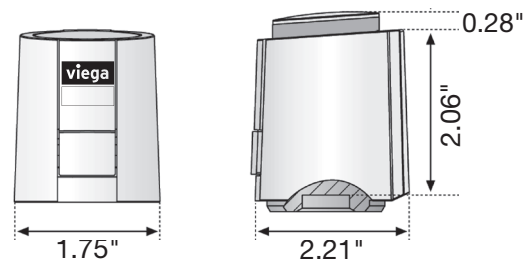

### ON / OFF Indicator


The powerhead has a cylinder on the top that will raise and expose blue when the valve is open. You will be unable to see any blue when the valve is in its normal closed position.

### Initially-Open Function

The powerhead is delivered in the open position. This allows for easier installations and also allows for the installer to pressure and flow test each circuit before connecting the power.

This function is disengaged automatically after the first 6 minutes of powered use.

### End Switch State

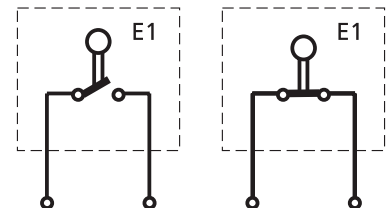

**V Viega LLC**  
585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-HC 1119 Powerhead for Stainless Manifolds 24V 4-Wire

**viega**