

Tech Data

Viega ProPress® Zero Lead Ball Valve Model 2971.1XL



Description

The two-piece zero lead brass ball valve is equipped with a full port, plated ball. The ball valve features EPDM sealing elements, EPDM stem

seals and Viega's Smart Connect® technology for easy identification of unpressed connections during testing.

Features

- Chromium-plated ball
- Lockable metal handle
- PTFE seats
- Smart Connect technology

Ratings

- 300 CWP
- Temperature Range: 0°F - 250°F
- Max. Operating Pressure: 300 psi

Approvals

- IAPMO/ANSI Z1157
- NSF®-61-372
- NSF®-U.P. Code
- Listed by NSF to Commercial Hot



This document is subject to updates. For the most current Viega technical literature, please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Brass C27453
Ball	Low Lead Brass Chromium Plated
Seat	PTFE
Stem	Brass C27450
Stem Seals	EPDM
Nut	Zinc-Plated Steel
Handle	Geomet-Plated Steel
Handle Cover	Polyvinyl
Sealing Element	EPDM

Viega ProPress Ball Valve Zero Lead Brass P x P - Model 2971.1XL

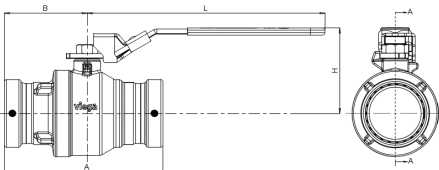

Part No.	Size (in)	A (in)	B (in)	H (in)	L (in)	Weight (lbs)
78300	2½	7.47	3.91	4.02	11.22	7.0
78305	3	8.15	4.17	4.37	11.22	9.7
78310	4	9.72	4.99	5.12	11.22	17.5



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PP 0823 Ball Valve 2971-1XL

viega