

Tech Data

Viega PureFlow® Press Tee Arrester



Description

Viega PureFlow Press Tee Arresters are AA sized mini arresters for use in PureFlow plumbing systems. They are designed to be installed in line close to the fixture where water hammer is present.

Features

- Approved for sealed wall installations with no access required
- May be installed at any angle
- AA sized

Ratings

- Max. Temperature: 180°F
- Max. Operating Pressure: 160 psi
- Fixture Units: 1 to 4

Approvals



- B135.5 / B125.1
- ASTM F1807
- ASME A112.18.1
- NSF / ANSI 372
- ANSI / ASSE 1010
- ASTM F877



- UPC®



This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero lead identifies Viega products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content.)

Component	Material
Arrester Body	Eco Brass
Arrester Barrel	305 Stainless Steel
Piston Body	Polypropylene
Piston O-rings	EPDM

Viega PureFlow Press Tee Arrester Zero Lead Brass P x P - Model 2894ZL

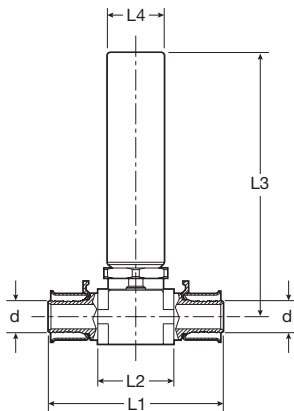

Part No.	Size (in) d	L1 (in)	L2 (in)	L3 (in)	L4 (in)
97114	1/2 x 1/2	2.59	1.12	3.91	0.84



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PF 1119 PureFlow Press Tee Arrester

