

## Tech Data

# Viega ProPress® Supply Stop Valve Models 2942.3ZL, 2942.4ZL



### Description

Viega ProPress stop valves are available in straight and angled

configurations. The valves are intended for potable water applications, and are manufactured from nickel-plated brass, featuring EPDM sealing elements and Viega's Smart Connect® Technology for easy identification of unpressed connections during pressure testing.

### Features

- Plated brass stem
- ¼-turn handle
- EPDM sealing element
- ProPress connections
- Smart Connect technology

### Ratings

- Temperature Range: 0°F to 180°F
- Max Operating Pressure: 160 psi

### Approvals

- ASME A112
- cCSAus
- NSF®-61-372
- NSF®-U.P. Code



This document is subject to updates. For the most current Viega technical literature, please visit [www.viega.us](http://www.viega.us).




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Nickel-Plated Brass
Ball	Plated Brass Ball
Stem	Nickel-Plated Brass
Sealing Element	EPDM

## Viega ProPress Supply Stop Valve - Models 2942.3ZL / 2942.4ZL

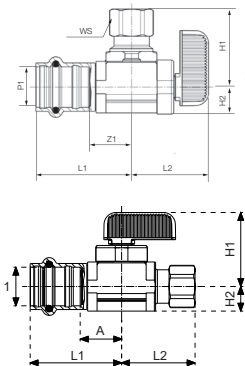

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	L2 (in)	A (in)	Cv (US gal/min)
2942.3ZL 2942.4ZL	1						
89995	½" CTS x ¾" OD	1.22	0.47	1.50	1.22	0.67	1.50
90000	½" CTS x ¾" OD	1.22	0.39	1.50	1.22	0.67	2.20



### Viega LLC

585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-PP 0424 ProPress Supply Stop Valve