

## Tech Data

# Viega PureFlow® Crimp Ball Valve



### Description

The Viega zero lead ball valve is equipped with a full port Eco Brass® body. The ball valve features Teflon® seals with EPDM and FKM stem seals.

### Features

- Plated Brass Ball
- PTFE Seals
- Nickel Plated Brass Stem
- EPDM & FKM Stem Seals

### Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 160 psi

### Approvals



- cSAUs



- UPC®

- NSF / ANSI 61-G

- NSF / ANSI 372

- ASTM F1807



This document is subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero lead identifies Viega products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content.)

Component	Material
Body	Eco Brass
Ball	Plated Brass
Seat	PTFE
Stem	Nickel Plated Brass
Stem Seals	EPDM & FKM
Handle	Nickel Plated Zinc

## Viega PureFlow Crimp Ball Valve Zero Lead Brass ¼ Turn - Model V5037ZL

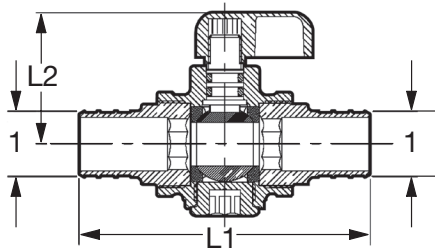

Part No.	Size (in)	L1 (in)	L2 (in)
	1		
46010	3/8	3.09	1.20
46031	1/2	2.76	1.20
46044	3/4	2.95	1.30

**V Viega LLC**  
585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-PF 1119 PureFlow Crimp Ball Valve

