

Tech Data

Viega ProPress® Zero Lead Threaded Ball Valve, Model 2800ZL



Description

Viega ProPress zero lead threaded ball valve is a full port ball valve intended for potable applications. The ball valve features female pipe threads and an EPDM stem seal.

Features

- 316 stainless steel stem
- 316 stainless steel ball
- Reinforced PTFE seats

Accessories

- Handle, Models 2971.8, 2971.26, 2971.46
- Stem Extension, Model 4070.96

Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 600 psi

Approvals

- ASME A112
- IAPMO/ANSI Z1157
- NSF®-61-372
- NSF®-U.P. Code
- Listed by NSF to Commercial Hot



This document is subject to updates. For the most current Viega technical literature, please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Zero Lead Brass CW511L
Ball	316 Stainless Steel
Seat	Reinforced PTFE
Stem	316 Stainless Steel
Stem Seals	EPDM
Nut	316 Stainless Steel

Viega ProPress Threaded Ball Valve Zero Lead - Model 2800ZL

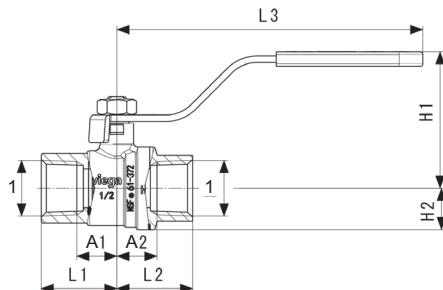

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	L2 (in)	L3 (in)	A1 (in)	A2 (in)	Cv (US gal/min)
	1								
87920	1/2	2.05	0.63	1.14	1.14	4.61	0.59	0.59	16
87925	3/4	2.17	0.75	1.30	1.30	4.61	0.71	0.71	27.1
87930	1	2.60	0.91	1.54	1.54	5.79	0.87	0.87	45.1
87935	1 1/4	2.83	1.18	1.77	1.77	5.79	1.10	1.10	106
87940	1 1/2	3.11	1.42	1.93	1.93	6.14	1.26	1.26	160
87945	2	3.43	1.73	2.17	2.17	6.14	1.46	1.46	255



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PP 0424 ProPress Threaded Ball Valve 2800ZL

viega