

Tech Data

Viega ProPress® Zero Lead Bronze Check Valve Model 2974ZL



Description

- Zero lead bronze body
- ProPress ends
- Spring check
- EPDM seals
- 0.5 psi cracking pressure

Features

- Low pressure loss
- Silent operation
- Stainless steel spring
- Smart Connect® technology

Ratings

- 400 WOG
- Max. Operating Pressure: 200 psi
- Temperature Range: 0°F - 200°F

Approvals

- Conforms to MSS SP-80
- NSF-61 Annex G



This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**




Zero lead identifies Viega products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content.)

Pressure Drop

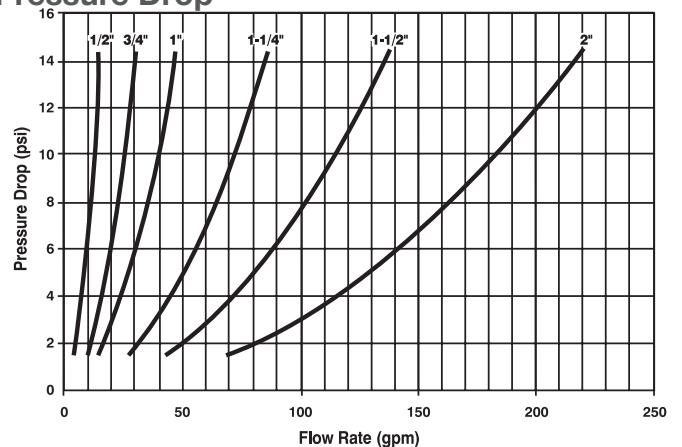

Viega ProPress Check Valve Zero Lead Bronze P x P - Model 2974ZL

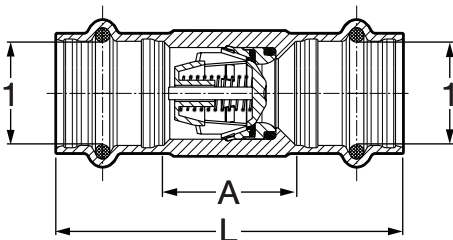

Part No.	Size	A (in)	L (in)
79035	1/2	0.87	2.52
79040	3/4	1.14	2.95
79045	1	1.34	3.15
79050	1 1/4	1.69	3.74
79055	1 1/2	2.09	4.92
79060	2	2.56	5.71

V Viega LLC
585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PP 1119 Bronze Check Valve 2974ZL

