

## Tech Data

# Viega ProPress® Strainer Valve Model 2981.1XL



### Description

Viega ProPress strainer valve has a zero lead brass body, stainless-steel mesh, and ProPress press ends. The valve features an EPDM sealing element and Viega's Smart

Connect® Technology for easy identification of unpressed connections during pressure testing.

### Features

- EPDM gasket
- EPDM sealing element
- ProPress connections
- Smart Connect technology

### Accessories

- Replacement 100 mesh – Model 2981.11

### Ratings

- Temperature Range: 0°F to 250°F
- Max Operating Pressure: 250 psi

### Approvals

- NSF®-61-372



This document is subject to updates. For the most current Viega technical literature, please visit [www.viega.us](http://www.viega.us).




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Zero Lead Brass CB770S
Cap Gasket	EPDM
Mesh	Stainless Steel
Cap	316 Stainless Steel
Screw-In Piece	CW511L
Sealing Element	EPDM

## Viega ProPress Strainer Valve - Models 2981.1XL

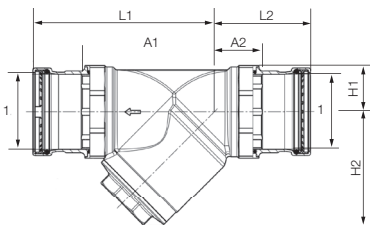

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	L2 (in)	A1 (in)	A2 (in)	Cv (US gal/min)
	<b>1</b>							
87260	2½	4.09	1.69	6.89	3.82	5.00	1.93	88.9
87265	3	4.80	1.97	7.68	4.09	5.63	2.05	126
87270	4	6.06	2.48	9.13	4.53	6.89	2.29	212.7

**Viega LLC**  
585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-PP 0424 ProPress Strainer Valve 2981-1XL

