

Tech Data

Viega ManaBloc® UL Listed Access Panel



Description

The Viega ManaBloc uninsulated UL rated access panel provides access through openings in fire-rated vertical surfaces while providing a concealed appearance. The panel is available in one size for use with a 30 port ManaBloc. It can be mounted between a standard 16" on center stud spacing (wood or steel type) and/or in a masonry wall. The access panel includes two external locking options which include the use of a flush key or knurled knobs.

Features

- 16 Gauge cold rolled steel frame
- 14 Gauge cold rolled steel door
- Baked on rust inhibitive gray prime finish
- Key or knob operated lock
- Spring door closure
- Flush continuous piano hinge

Listings


cULus listed "B" label for 1½ hours in vertical surfaces (maximum temperature rise to 250°F in 30 minutes)



This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.



Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**

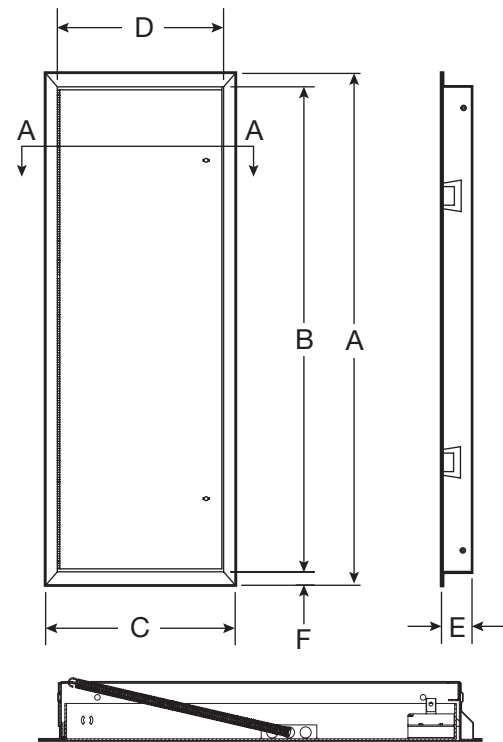

A-A View (2x Scale)

ManaBloc Access Panel

Part No.	W x L (in)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
50740	14 x 40	43	41	16.25	14.25	3	1



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PF 1119 ManaBloc UL Listed Access Panel

viega

